

PRODUCT DESCRIPTION: The IBU is an integral ball valve and union. The IBU uses a full-port ball valve with a union ended brass body that provides two (2) ¼" taps for accessories to be installed. All taps are plugged unless otherwise specified. Memory stops are available upon request. Fixed end connections may be SWT or FNPT. Union side connections available include MNPT, FNPT, and SWT, and a variety of reductions.

STANDARD MATERIAL SPECIFICATIONS									
Body O-Ring Tail Piece Union Nut Handle Stem Ball Ball Seat	Forged Brass ASTM B283-06 or ASTM B763-08A EPDM Brass ASTM B124-09, B228-06, or B763-08A Brass ASTM B455 Chrome Plated Steel Brass ASTM B124-09 - Blow-Out Proof Chrome Plated Brass - Full Port Teflon								
STANDARD OPERATING SPECIFICATIONS									
Maximum Working Pressure: 600 WOG / CWP Maximum Operating Temperature: 250° F									
Specification information is provided to assist and is given without obligation or warranty. The Company reserves the right to make changes in design, materials, and/or specifications without notice or liability.									

PRODUCT SPECIFICATIONS:

- Devices shall have a full port isolation valve to provide unrestricted flow
- Devices shall be designed to accept a memory stop
- Devices shall have a union end which allows for quick and convenient connection

												Hydronic Specialties					
										5	Specialties						
IBU Series Dimensions																	
Integral Ball Valve/Union																	
												+					
						- H -		<u> </u>	-		Ē				Î		
								\mathbb{N}						F	 >1		
									μĘ		\neg)	I			
													Ĩ		ļ		
						А В —	-						1	-	C		
												Ц Ц	\int				
))				
] 1			<u>/</u>		<u>*</u>		
MODEL	SIZE	A	TAIL PIECE	В	Lbs	с	н	P1	* Cv		MODEL	SIZE	А	TAIL PIECE	В	Lbs	
IBU1	1⁄2" - SWT	3.5	- M 1⁄2" - F	5.1 4.2	1.2	- 2.5		2.0	19	-		1¼" - SWT	5.2	1⁄2" - M 3⁄4" - M	7.0	3.6	
	½" - FPT	3.2	- S - M ½" - F	4.2 4.7 3.8	1.1 1.2 1.2		3.8							<u>1" - M</u> - M 1¼" - F	7.0 7.0 6.0	3.8 3.9 3.6	
			- S	3.8 5.3	1.2 1.1 1.5						IBU4			- S 1⁄2" - M	6.2 6.2	3.4 3.2	
		3.8	1⁄2" - F - S	4.9 4.5	1.6	- 2.7	3.8					1¼" - FPT	4.5	⁷² - M ³ ⁄ ₄ " - M 1" - M	6.5 6.5	3.3 3.4	
	¾" - SWT		- S - M 3⁄4" - F	5.5	1.4 1.5			2.2						- M - M 1¼" - F	6.5 5.6	3.4 3.1	
IBU2			- S	4.6	1.5 1.4				35					- S 3⁄4" - M	5.7	3.0	
	¾" - FPT	3.3	- M 1⁄2" - F	4.8 4.4	1.5 1.6	-						1½" - SWT	5.8	1" - M	8.0	4.9	
			- S - M	4.1 5.0	1 <u>4</u> 1.6									1¼" - M - M	8.1 8.1	5.0 4.9	
			¾" - F - S	4.1	1.5									1½" - F - S	7.0 7.0	4.6 4.4	
	1" - SWT	4.1	½" - M	4.1 6.5	1.4 2.1						IBU5	1½" - FPT	5.2	³⁄₄" - M	7.1	4.4	
			³∕₄" - M ³∕₄" - S	6.5 5.2	2.1 1.9									1" - M 1¼" - M	7.5 7.5	4.8 4.8	
			- M	6.5	2.2									- M	7.5	4.7	
			1" - F - S	5.3 5.4	2.0		-							1½" - F - S	6.5 6.3	4.4 4.2	
IBU3	1" - FPT	3.7	½" - M	5.7	2.1	2.7	5.0	2.2	49			2" - SWT	7.1	1" - M 1¼" - M	10.1 10.0	8.0	
			³∕₄" - M 3∕4" - S	5.7 4.5	2.1									1½" - M 1½" - M	10.0	7 <u>.</u> 7 7.7	
			- M	5.7	2.2						BUG			- M 2" - F	10.0 8.2	7.7 7.1	
			1" - F - S	4.6 4.7	2.0									- S	8.5	6.7	
	Dimensions		do not ii	nclude	ProP						IBU6			1" - M 1¼" - M	8.9 8.9	7.8 7.4	
fittings o variation	r adapters.							-				2" - FPT	6.0	11⁄₂" - M	8.9	7.4	
variations. Consult with factory for confirmation of dimensions and material specifications at the time of order. Sweat size listed is nominal										2 - FP1	0.0	- M 2" - F	8.9 7.0	7.4 6.8			

Note: Dimensions listed do not include ProPress or any other special fittings or adapters. All dimensions and materials are subject to minor variations. Consult with factory for confirmation of dimensions and material specifications at the time of order. Sweat size listed is nominal and will differ from the actual, measurable size.

* Cv = Estimated with union connection same as inlet, no reductions.

6.4

- S 7.2 С

3.2

3.5

5.5

6.3

3.5

2.7

266

297

3.0

н


4.6

P1

2.5

* Cv

102

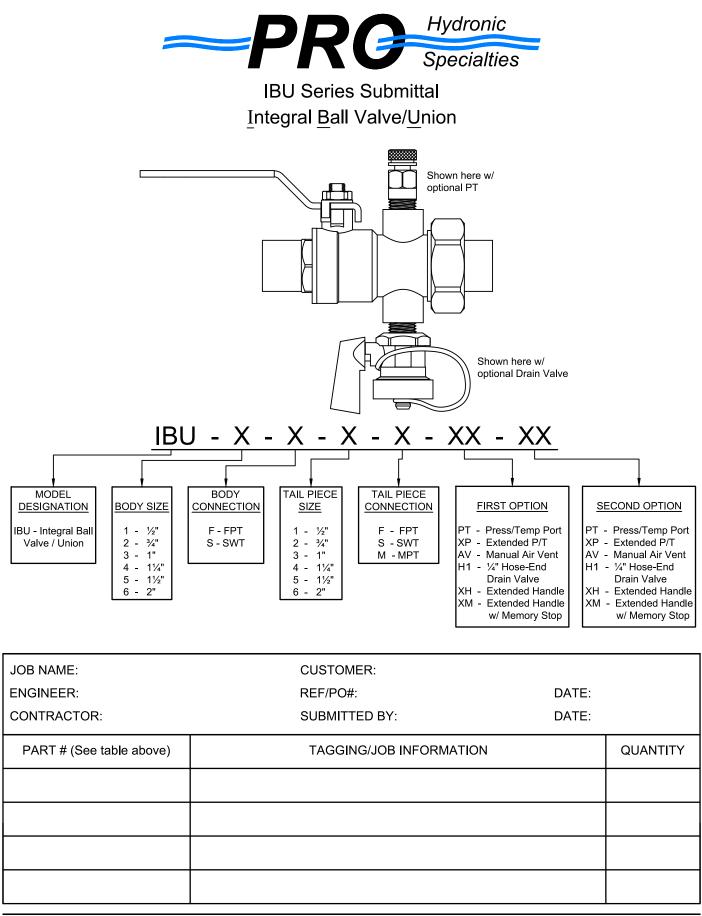

PRO Hydronic Specialties, L.L.C. www.prohydronicspecialties.com