




HSA Series Specifications

Hose Stainless Adaptor

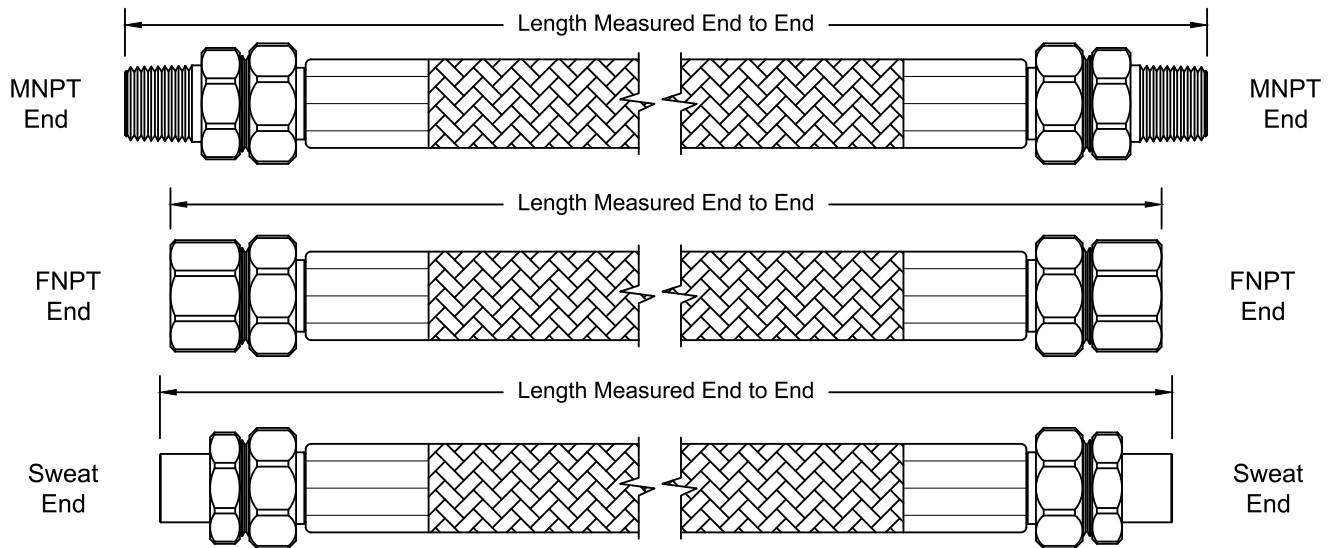

PRODUCT DESCRIPTION: The Model HSA is a stainless steel braided hose that is abrasion resistant. The HSA has a CPE inner tube with brass end connections and stainless steel ferrules for the ½" - 1" hose sizes. The flexible hose eases installation and is designed to withstand high pressures and varying temperatures. The standard end connections are fixed MNPT, FNPT and Sweat fittings. The Model HSA is BUY AMERICAN COMPLIANT.

PRODUCT SPECIFICATIONS	
Tube	CPE (Chlorinated Polyethylene) for ½" - 1" sizes - SAE J1019
Reinforcement	304L Stainless Steel braid cover meets UL-94 requirements
Ferrules	Type 304L stainless Steel
End Fittings	½" - 1" I.D. - Brass
End Connections	Fixed MNPT, FNPT, and Sweat
Temperature	-40°F to 257°F (-40°C to 125°C)
Ratings	Meets UL-94 Requirements Fire Retardant Material (CPE)

Specification information is provided to assist and is given without obligation or warranty. The Company reserves the right to make changes in design, materials, and/or specifications without notice.



Size	Length	Working PSI	Bend Radius	** Cv
½"	12, 18, 24, 30, 36	600 PSI	5"	7
¾"	12, 18, 24, 30, 36	600 PSI	7"	20
1"	12, 18, 24, 30, 36	600 PSI	10"	43

Length is measured End to End on all hose connection types.

** Cv listed in chart above is for a 24" length hose. The Cv is estimated and can vary according to installation.



HSA Series Specifications Hose Stainless Adaptor

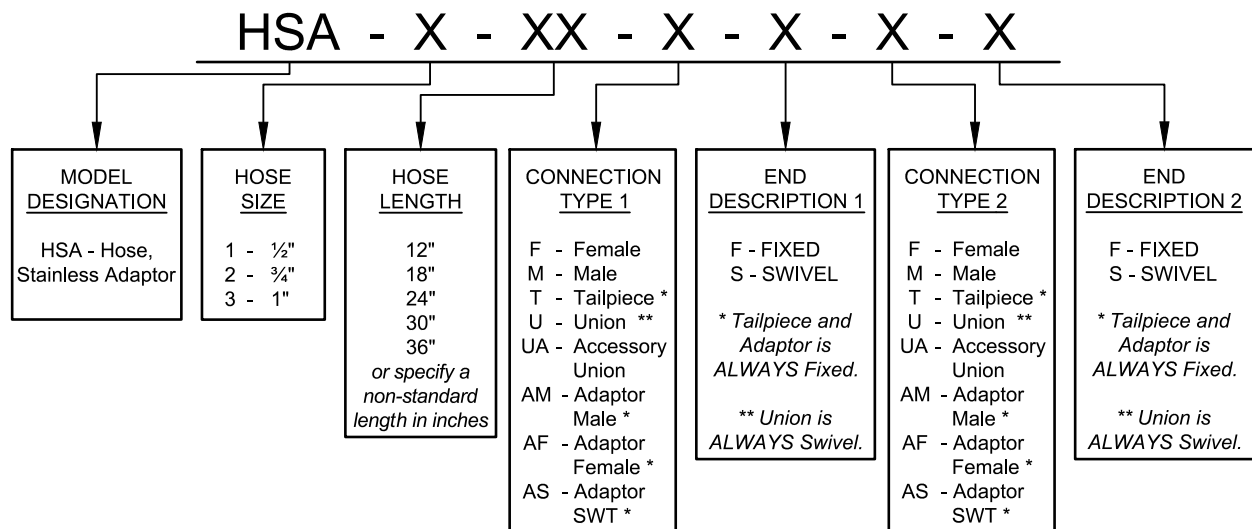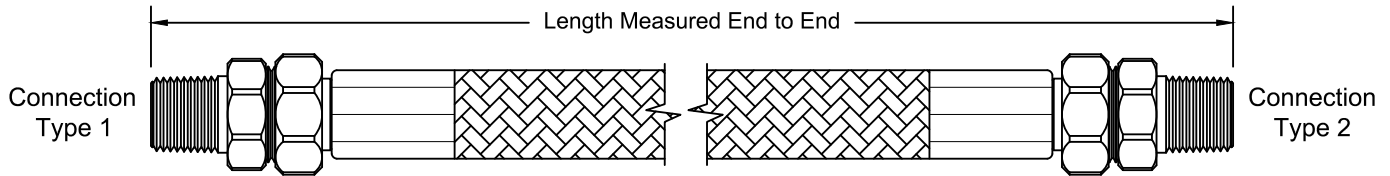

When ordering, at least one hose end connection must be a swivel.

JOB NAME:		REPRESENTATIVE:	
ENGINEER:		REF/PO#:	
CONTRACTOR:		SUBMITTED BY:	
		DATE:	
		DATE:	

PART # (See table above)	QUANTITY